ATTORNEY'S DOCKET NI MARER

FORM (REV 1	PTO-139 11-2000)	390 (Modified) U.S. DEPARTMENT	T OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER				
			TO THE UNITED STATES	L9289.01155				
٠		DESIGNATED/ELECT/	ED OFFICE (DO/EO/US)	U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR				
			NG UNDER 35 U.S.C. 371	09/869456				
INTE		TIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED				
ן זידוים		PCT/JP00/07422 INVENTION	October 24, 2000	October 27, 1999				
		E COMMUNICATION TERM	MINAL APPARATUS AND HAND-OV	VER METHOD				
		/0	TO ATTACATOS AND HAID-ON					
		T(S) FOR DO/EO/US JUN 25	20m 25					
		CANEMOTO (SATO						
			ates Designated/Elected Office (DO/EO/US) th	_				
1.	\boxtimes		items concerning a filing under 35 U.S.C. 371.					
2.			QUENT submission of items concerning a filin	-				
3.	X	(9) and (24) indicated below.		C. 371(f)). The submission must include itens (5), (6),				
4.			expiration of 19 months from the priority date	(Article 31).				
5.	\boxtimes	• •	lication as filed (35 U.S.C. 371 (c) (2))					
			uired only if not communicated by the Internal	itional Bureau).				
2016. 2016			ed by the International Bureau.					
D,	5 21		application was filed in the United States Rece	,				
The leaf that the limb part lines lines	\boxtimes		of the International Application as filed (35 U	J.S.C. 371(c)(2)).				
in in		a. 🛛 is attached hereto.						
	_		bmitted under 35 U.S.C. 154(d)(4).					
≓7. ∏			e International Application under PCT Article					
			quired only if not communicated by the Interna	ational Bureau).				
			ted by the International Bureau.					
First Breeze			owever, the time limit for making such amendr	ments has NOT expired.				
II 8				· · · 1 · 10 (05 11 0 C 271 (2)(2))				
8. 9.	⋈	An english language translation of An oath or declaration of the investigation.	of the amendments to the claims under PCT A ventor(s) (35 U.S.C. 371 (c)(4))	article 19 (35 U.S.C. 3/1(c)(3)).				
J 0.			of the annexes of the International Preliminary	y Examination Report under PCT				
11.								
12.	⋈		A copy of the International Preliminary Examination Report (PCT/IPEA/409). A copy of the International Search Report (PCT/ISA/210).					
			•					
13.	tems 1.	13 to 20 below concern document(An Information Disclosure State)	t(s) or information included: ement under 37 CFR 1.97 and 1.98.					
14.	×		cording. A separate cover sheet in compliance					
15.		A FIRST preliminary amendmen		WITH 37 CFK 3.20 and 3.31 is included.				
16.		A SECOND or SUBSEQUENT						
17.		A substitute specification.	premimary amendment.					
18.		A change of power of attorney an	nd/or address letter.					
19.			e sequence listing in accordance with PCT Rule	le 13ter.2 and 35 U.S.C. 1.821 - 1.825.				
20.			international application under 35 U.S.C. 154(
21.			nguage translation of the international application					
22.		Certificate of Mailing by Express						
23.	\boxtimes	Other items or information:						
		Claim for Priority with PCT/IB PCT/IB/308	3/304					
ĺ		PCT/RO/101						

231 KBC G PUIPIC 29 JUN 2001

U.S. APPLICATION	NO (IF KNOWN, SE	E 37 CFR	INTERNATIONAL .	APPLICAT (P00/074 2		NO.			DOCKET NUMBER 89.01155
24. The fol	llowing fees are sub	mitted:	101.5	1 00/0 / 42			T		
	L FEE (37 CFR 1		(5)):				CA	LCULATION	S PTO USE ONLY
☐ Neither intellinter internationa	rnational preliminar l search fee (37 CFF	y examination R 1.445(a)(2))	fee (37 CFR 1.482):			\$1000.00			
☑ Internationa USPTO but	l preliminary examinational Search	nation fee (37 n Report prepa	CFR 1.482) not paid ared by the EPO or JF	to PO		\$860.00			
☐ Internationa									
☐ Internationa but all claim	l preliminary examinas did not satisfy pro	nation fee (37 visions of PC	CFR 1.482) paid to UT Article 33(1)-(4)	USPTO		\$690.00			
☐ Internationa and all clain	l preliminary examinas satisfied provision	nation fee (37 ns of PCT Art	CFR 1.482) paid to Uicle 33(1)-(4)	USPTO		\$100.00			
	ENTER AP	PROPRI	ATE BASIC FI	EE AM	OUI	= TV		\$860.00	
Surcharge of \$130.0 months from the ear	00 for furnishing the rliest claimed priorit	oath or decla y date (37 CI	ration later than FR 1.492 (e)).	□ 2	0	□ 30		\$0.00	
CLAIMS	NUMBER	FILED	NUMBER EX	TRA		RATE			
Total claims	6	- 20 =	0		х	\$18.00		\$0.00	
Independent claims		- 3=	0		Х	\$80.00	<u> </u>	\$0.00	
Multiple Dependent	t Claims (check if a		ADOVE CAL	CITIE A TE		TO.	 	\$0.00	
Applicant clair			ABOVE CALOR 1.27). The fees ind				 	\$860.00	
Applicant clain reduced by 1/2	2.	is. (See 37 Cr	K 1.27). The fees ind	icated abo	ve are			\$0.00	
				SUB	<u> [O7</u>	$\Gamma AL =$		\$860.00	
Processing fee of \$1 months from the ear	30.00 for furnishing liest claimed priorit	g the English t y date (37 CF	translation later than FR 1.492 (f)).	□ 20	0	□ 30 +		\$0.00	
			TOTAL NAT	TONAL	L FI	EE =		\$860.00	
Fee for recording th accompanied by an	e enclosed assignme appropriate cover sh	ent (37 CFR 1 neet (37 CFR 1	.21(h)). The assignm 3.28, 3.31) (check if	ent must b	е е).	×		\$40.00	
			TOTAL FEES	ENCL	OS	ED =		\$900.00	
								unt to be: efunded	\$
gradia Gradia								charged	\$
a. 🗵 Ach	neck in the amount o	f \$900.	00 to cover the	above fees	s is er	nclosed.			
Selvinger"									ne above fees.
c. 🗵 The	The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment								
d. 🔲 Fees	d. Deposit Account No A duplicate copy of this sheet is enclosed. d. Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.								
NOTE: Where an 1.137(a) or (b)) mu	appropriate time li st be filed and gran	mit under 37 ited to restore	CFR 1.494 or 1.495 e the application to p	has not b ending st	een n atus	net, a petitio	n to r	evive (37 CFR	
SEND ALL CORRE	ESPONDENCE TO:			,	4	Jun 5		llala ~	
James E. Ledbette STEVENS, DAVIS	SIGNATURE								
1615 L Street, N.V	James E. Ledi			better					
Washington, DC 2	Washington, DC 20036						NAME		
Fax: 202-408-5200					28.	732			
						GISTRATIC	N NI	MBER	
					DA	ne 25, 2001			
					DA	. 4.45			

COMPACIO CONTOL

DESCRIPTION

MOBILE COMMUNICATION TERMINAL APPARATUS AND HAND-OVER
CONTROL METHOD

5

Technical Field

The present invention relates to a mobile communication terminal apparatus and a hand-over control method.

10

15

20

25

Background Art

Hand-over, by which a mobile station observes control channel signals such as a perch channel signals at waiting time for anytime selection of a cell or a sector to which the above station is belonging, is called as idle hand-over. After the above idle hand-over, the above mobile station is put into a waiting state to accept outgoing calls of the own station and to receive paging channel signals for detection of incoming-calls to the own station. As described above, the above mobile station efficiently selects the cell or the sector, using the above waiting time, by performing the above idle hand-over.

In a conventional idle hand-over method, the above mobile station compares the received quality between a control channel signal transmitted from a base station in a cell to which the above mobile station is belonging, and a control channel signal transmitted from a base

10

15

20

station in an adjacent cell and other cells, and performs hand-over so as to select a base station with better received quality. Moreover, the above mobile station performs in a similar manner hand-over between sectors by comparison of the received quality among control channel signals assigned to each sector.

However, the above conventional idle hand-over method has the following problems. Hereinafter, the problems of the conventional idle hand-over method will be described, referring to FIG. 1 and FIG. 2. FIG. 1 is a conceptual diagram of cells in a radio communication system, and FIG. 2 is a diagram showing relations between fluctuation states of the received levels of control channel signals and selection states of cells in the conventional idle hand-over operation method.

In FIG. 1, a mobile station 30 is now located in the vicinity of the boundary between a cell 1 in which a base station 10 exists and a cell 2 in which a base station 20 exists. In such a case, the mobile station 30 may receive both of a control channel signal assigned to the cell 1 (hereinafter, called as "cell 1 signal") and that assigned to the cell 2 (hereinafter, called as "cell 2 signal").

In such a state, as the received levels of the both

25 are comparable each other, there is small difference in
the received quality at the mobile station 30 between
communicating with the base station 10 and communicating

10

15

20

25

with the base station 20. That is, the mobile station 30 has no special need for hand-over.

However, in such a state, which signal of the cell 1 signal and the cell 2 signal is received by the mobile station 30 at higher level is changed every moment due to fluctuated propagation environment and so on. Therefore, which cell of the cell 1 and the cell 2 is selected for the mobile station 30 is changed every moment.

Specifically, as the received level of the cell 1 signal and that of the cell 2 signal is comparable each other and there is small difference between them as shown in FIG. 2, a control channel signal with a higher received level is changed every moment at timing of t1 through t4 for reception and selection of control channel signals. Accordingly, a control channel signal and a cell to be selected for the mobile station 30 are also changed every moment at timing of t1 through t4. Thereby, there have occurred a problem that unnecessary hand-over operations are frequently performed to cause increased battery consumption at the mobile station 30.

Moreover, there has been another problem that the mobile station 30 performs useless operations, that is, receives a plurality of control channel signals, compares the received levels among them, and selects one cell at every timing of t1 through t4, though there is no special need for the hand-over.

Furthermore, there has been further another problem

10

15

20

that there is an increased possibility of failed incoming-calls to cause reduction in an incoming-call success rate when hand-over is frequently generated, as the mobile station 30 has a need for switching of received paging channel signals for detection of incoming-calls from base stations at each selection of one cell.

Disclosure of Invention

The object of the present invention is to provide a mobile communication terminal apparatus and a hand-over control method by which battery saving may be achieved by reduction in useless processing for hand-over control, and the frequency of unnecessary hand-over, and, at the same time, reduced incoming-call success rate may be prevented.

In order to achieve the above object, the present invention has a configuration that the frequency of selection operation of a cell or a sector by comparison of the received quality among a plurality of control signals such as perch channel signals (hereinafter, called as "comparison selection operation") is reduced, and, at the same time, a plurality of paging channel signals are received, when hand-over is generated at a frequency equal to or higher than a predetermined frequency.

25

Brief Description of Drawings

FIG. 1 is a conceptual diagram of cells in a radio

10

15

communication system.

FIG. 2 is a diagram showing relations between fluctuation states of the received levels of control channel signals and selection states of cells in a conventional idle hand-over method.

FIG. 3 is a principal block diagram showing a schematic configuration of a radio reception apparatus installed in a mobile communication terminal apparatus according to one embodiment of the present invention.

FIG. 4 is a flowchart for description of operations of the mobile communication terminal apparatus according to the above embodiment of the present invention.

FIG. 5 is a diagram showing relations between fluctuation states of the received SIRs of control channel signals and selection states of cells in a hand-over control method according to the above embodiment of the present invention.

Best Mode for Carrying Out the invention

Hereinafter, one embodiment according to the present invention will be described in detail, referring to drawings.

(Embodiment)

FIG. 3 is a principal block diagram showing a schematic configuration of a radio reception apparatus installed in a mobile communication terminal apparatus according

5

10

15

20

25

to one embodiment of the present invention. Hereinafter, there are described a case where a received SIR (Signal to Interference Ratio) is used as one example of a value denoting the received quality. However, any value such as a received level may be used as a value denoting the received quality if it may denote the received quality.

In FIG. 3, a radio reception section 102 performs predetermined radio processing (down conversion, A/D conversion and so on) of signals received through an antenna 101. A plurality of despreading sections 103 are provided corresponding to each cell for despreading of the received signals with spread codes assigned to each cell. A demodulation section 104 performs predetermined demodulation processing of signals in a user data part. Thereby, received data may be obtained.

Here, a plurality of despreading sections 103 and demodulation sections 104 are provided, corresponding to each cell.

On the other hand, a measurement section 105 measures, at predetermined timing, received SIRs of control channel signals among despread received signals. And the measurement section 105 reduces the frequency of measurement of the received SIRs when hand-over is generated at a frequency equal to or higher than a predetermined frequency. Here, control channel signals are spread with spread codes assigned to each cell.

A counter 106 is a counter for counting a number of

5

10

15

20

25

times of measurement timing during which measurement of the received SIRs of control channel signals is not performed, when the measurement section 105 does not measure the received SIRs of control channel signals for the measurement timing subsequent to the measurement timing at which hand-over is generated at a frequency equal to or higher than the predetermined frequency.

A selected cell storing section 107 stores information denoting the currently selected cell. Information denoting a cell is, for example, a unique number assigned to each cell, and so on. A selection section 108 selects a control channel signal with the maximum received SIR among measured received SIRs for selection of a cell, only when the received SIRs of control channel signals are measured in the measurement section 105.

A recording section 109 accumulates and records a number of changing times of cells to be selected, that is, a number of times for hand-over. And, the recording section 109 accumulates and records the number of selected times till the present time for each cell.

A judgement section 110 controls to reduce the frequency of comparison selection operations when the frequency of changing cells to be selected becomes equal to or higher than the predetermined frequency. Moreover, the judgement section 110 controls the despreading section 103 for reception of paging channel signals

transmitted from a plurality of base stations in high order with regard to the number of selected times, when the frequency of changing cells to be selected becomes equal to or higher than the predetermined frequency. Here, the above paging channel signal is a control channel signal for a mobile station to detect incoming-calls to the own station.

Now, operations for a mobile communication terminal apparatus with the above configuration will be described.

10 FIG. 4 is a flowchart for description of operations of the mobile communication terminal apparatus according to the above embodiment of the present invention, and FIG. 5 a diagram showing relations between fluctuation states of the received SIRs of control channel signals and selection states of cells in a hand-over control method according to the above embodiment of the present invention.

A series of operations shown in the flow chart of FIG. 4 are performed respectively at predetermined timing of t1 through t9 as shown in FIG. 5. Hereinafter, it is assumed that a control channel signal assigned to the cell 1 is called as "cell 1 signal", and an assigned one to the cell 2 as "cell 2 signal".

In the first place, the measurement section 105 refers
to a count value of the counter 106 at a step (hereinafter,
shortened as "ST") 201. And, when the count value is "0",
the measurement section 105 measures the received SIRs

10

15

20

25

of a plurality of control channel signals for feeding of the measurement result to the selection section 108 at ST 202.

Subsequently, the selection section 108 selects at ST 203 a control channel signal with the maximum received SIR according to the measurement result at ST 202. That is, a cell as a hand-over end is selected. Then, the selection section 108 feeds information denoting the selected cell to the judgement section 110.

Thereafter, the selection section 108 increases by times selected one the number of for the selected-this-time cell among numbers of selected times recorded in the recording section 109 at ST 204. Moreover, the selection section 108 increases by one the number of changing times for the selected cell recorded in the recording section 109, when there is a difference in the case of comparison between the currently selected cell and the selected-this-time cell, referring to the selected cell storing section 107. And, at the same time, the information stored in the selected cell storing section 107 is updated according to the selection result by the selection section 108.

Subsequently, the judgement section 110 refers to the recording section 109, and calculates the changing frequency of the selected cell for comparison with the predetermined threshold at ST 205. Here, the changing frequency of the selected cell means how many times the

10

15

20

25

selected cell has been changed during predetermined times of measuring timing till the present time, that is, a value denoting a ratio of the changed times to the above predetermined times. That is, the changing frequency of the selected cell is a value denoting a hand-over execution frequency during a predetermined interval. Now, the changing frequency of the selected cell is calculated as "0.5 (50%)", when hand-over is assumed to be executed, for example, two times among four times of measurement timing till the present time.

When the above changing frequency is equal to or higher than the predetermined threshold, the judgement section 110 sets a predetermined number of times in the counter 106 at ST 206. Here, the above predetermined number of times means a number of times of measuring timing during which the measurement section 105 does not measure the received SIRs of control channel signals, and a number of times of measuring timing during without measurement of the received SIRs of control channel signals may be adjusted in an arbitrary manner by properly changing the above predetermined number of times. Specifically, when the predetermined number of times is set as "1", the measurement of the received SIRs is performed at every other measurement timing after the timing at which the changing frequency is equal to or higher than the Accordingly, when the predetermined threshold. is set as "1", the predetermined number of times

10

15

measurement frequency of the received SIRs may be reduced by half after the timing at which the changing frequency is equal to or higher than the predetermined threshold.

Then, the judgement 110 controls at ST 207 the despreading section 103 for reception of paging channel signals assigned to the selected cell according to information denoting the selected cell fed from the selection section 108. According to the above control, the despreading section 103 despreads the paging channel signals assigned to the selected cell for reception processing.

On the other hand, the measurement section 105 decreases a counter value of the counter 106 by one at ST 208, when the above counter value is not "0" at ST 201. Moreover, in such a case, the measurement section 105 does not measure the received SIRs of the control channel signals. Then, the measurement section 105 feeds to the judgement section 110 a signal for notification that the received SIRs are not measured.

The judgement section 110 refers to the recording section 109 at ST 209, when the judgement section 110 accepts the above notification that the received SIRs are not measured. Then, the judgement 110 controls the despreading section 103 for reception of paging channel signals assigned to a plurality of cells in high order with regard to the number of selected times. Accordingly, by the above control, the despreading section 103

10

15

despreads in parallel a plurality of paging channel signals transmitted from base stations with higher selection frequency, that is, base station reasonable as a selection candidate during timing at which the received SIRs are not measured, and performs reception processing. Here, a plurality of the paging channel signals may be received, and there is no special limit on the number if the number is not a single. The range in high order may be properly set.

Timing for comparison selection operation and selected cells after the above operations are shown in FIG. 5. Black spots show points of timing for measurement of the received SIR of the cell 1 signal, and white spots points of timing for measurement of the received SIR of the cell 2 signal in FIG. 5. Here, the mobile communication terminal apparatus is assumed to receive two control channel signals of the cell 1 signal and the cell 2 signal for convenient description.

Now, the counter value of the counter 106 is assumed to be "0" as an initial state. The cell 1 is selected at measurement timing t1, as the received SIR of the cell 1 signal is higher than that of the cell 2 signal. Similarly, the selected cells are changed at every measurement timing in the following way: the cell 2 is selected at measurement timing t2; the cell 1 at t3; the cell 2 at t4; and the cell 1 at t5.

Now, it is assumed, for example, that a predetermined

15

20

25

threshold of the changing frequency is a threshold showing a changing frequency during four times of measurement timing till the present time, and is set as "1 (100%)". Here, the changing frequency becomes "1 (100%)", and becomes equal to or higher than the predetermined threshold at t5, as the selected cell is changed every time at four times of measurement timing of t2 through Then, the predetermined number of times (now, set as "1" here), is set in the counter 106. Accordingly, measurement of received SIRs is performed at every other timing after the timing t5 at which the changing frequency is equal to or higher than the predetermined threshold. That is, the next measurement of the received SIR of the control channel signal is performed at timing t7. As described above, the frequency of comparison selection operations may be reduced by half after the timing t5 at which the changing frequency is equal to or higher than the predetermined threshold.

Subsequently, the mobile communication terminal apparatus receives in parallel two paging channel signals transmitted from two base stations existing in the cell 1 and in the cell 2 respectively, both of which have a high selection frequency, at timing t6 and t8 during which the measurement of the received SIR is not performed.

Thus, according to the mobile communication terminal apparatus and the hand-over control method of the present embodiment, the frequency of comparison selection

10

15

20

25

operations may be decreased when the hand-over is generated at a frequency equal to or higher than the predetermined frequency. Thereby, the frequency of useless comparison selection operations and that of unnecessary hand-over operations may be reduced. Accordingly, battery saving may be achieved and, at the same time, the reduced incoming-call success rate due to frequent hand-over may be prevented.

Moreover, in the case of no comparison selection operations, the mobile communication terminal apparatus receives a plurality of paging channel signals. Therefore, the mobile communication terminal apparatus may surely perform incoming-calls even in the case of no comparison selection operations.

Furthermore, as control channel signals are individually assigned even to each sector, the mobile communication terminal apparatus according to the above embodiment may perform the hand-over control in a similar manner to the above one when the mobile communication terminal apparatus is located in the vicinity of the boundary between sectors.

Moreover, a plurality of despreading sections and demodulation sections have been provided for reception of a plurality of control channel signals and a plurality of paging channel signals in the mobile communication terminal apparatus according to the above embodiment. However, a plurality of control channel signals and a

10

15

plurality of paging channel signals may be received by time sharing activation of one despreading section and one demodulation section.

Moreover, the mobile communication terminal apparatus and the hand-over control method according to the above embodiment may be also applied to idle hand-over operations. When applied, reduction in the frequency of useless comparison selection operations and for unnecessary hand-over may be realized at idle hand-over.

And, a radio reception apparatus may be made inactive to a sleeping state during no measurement of a received SIR of a control channel signal in the mobile communication terminal apparatus according to the above embodiment.

As described above, battery saving may be achieved by reduction in the frequency of useless processing at hand-over control and for unnecessary hand-over, and, at the same time, the reduced incoming-call success rate may be prevented, according to the present invention.

This application is based on the Japanese Patent
20 Application No. HEI 11-305419, filed on Oct. 27, 1999,
the entire contents of which are expressly incorporated
herein by reference.

Industrial Applicability

The present invention may be applicable to a mobile communication terminal apparatus used in a mobile communication system.

10

15

20

CLAIMS

1. A mobile communication terminal apparatus comprising:

a comparison selector for performing a comparison selection operation by which a control channel signal with the best received quality is selected after comparison of the received quality of a plurality of control channel signals; and

a measurer for measuring of a switching frequency of control channel signals at a predetermined interval, wherein

said comparison selector reduces the frequency of the comparison selection operations when the switching frequency is equal to or heigher than a predetermined threshold.

2. The mobile communication terminal apparatus according to claim 1, further comprising:

a receiver for receiving a plurality of control channel signals for detection of incoming-calls, when the frequency of the comparison selection operations is reduced.

3. The mobile communication terminal apparatus according to claim 2, further comprising:

a recorder for recording of selection times for each

25 hand-over end according to a selection result, wherein

said receiver receives a plurality of control channel

signals, which are assigned hand-over ends with higher

15

selection frequency, for detection of incoming-calls.

- 4. The mobile communication terminal apparatus according to claim 1, wherein said mobile communication terminal apparatus is activated at waiting time.
- 5. A hand-over control method, wherein

a frequency of comparison selection operations for selection of a control channel signal with the best received quality among a plurality of control channel signals is reduced, when a frequency of hand-over operations which is generated during a predetermined interval is equal to or higher than a predetermined threshold.

6. The hand-over control method according to claim5, wherein

a plurality of control channel signals for detection of incoming-calls are received in the case of reduction in the frequency of the comparison selection operations.

ABSTRACT

recording section records a 109 hand-over a predetermined generation frequency at interval according to the result of comparison selection operations in a selection section 108, a judgement section 110 compares the hand-over generation frequency and a predetermined threshold, and a measurement section 105 decreases a measurement frequency of the received quality of a control channel signal after the hand-over generation frequency is equal to or higher than the predetermined threshold. Moreover, the judgment section 110 controls a despreading section 103 for reception of a plurality of paging channel signals in the case of reduction in the measurement frequency.

15

10

5

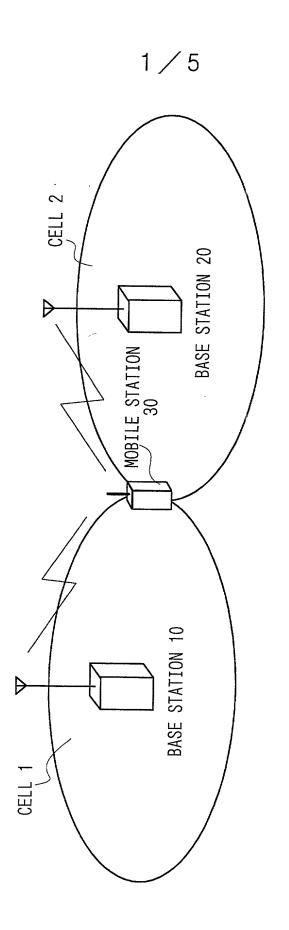


FIG. 1

2/5

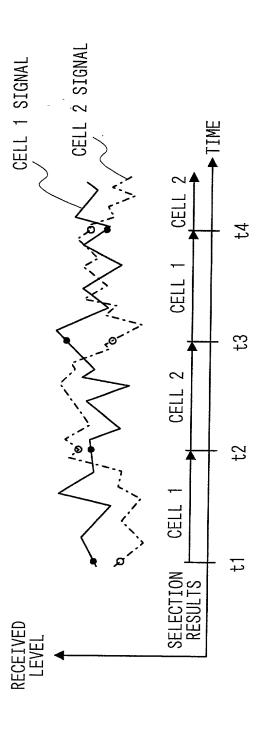


FIG. 2

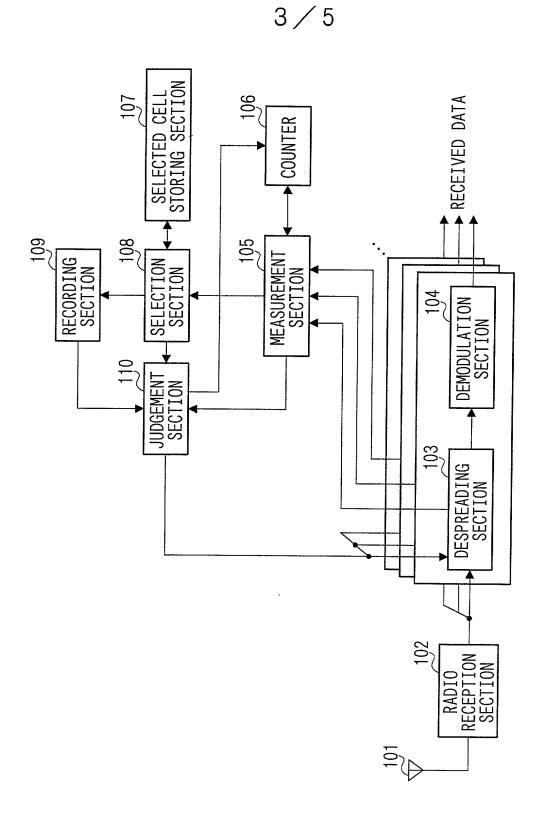


FIG. 3

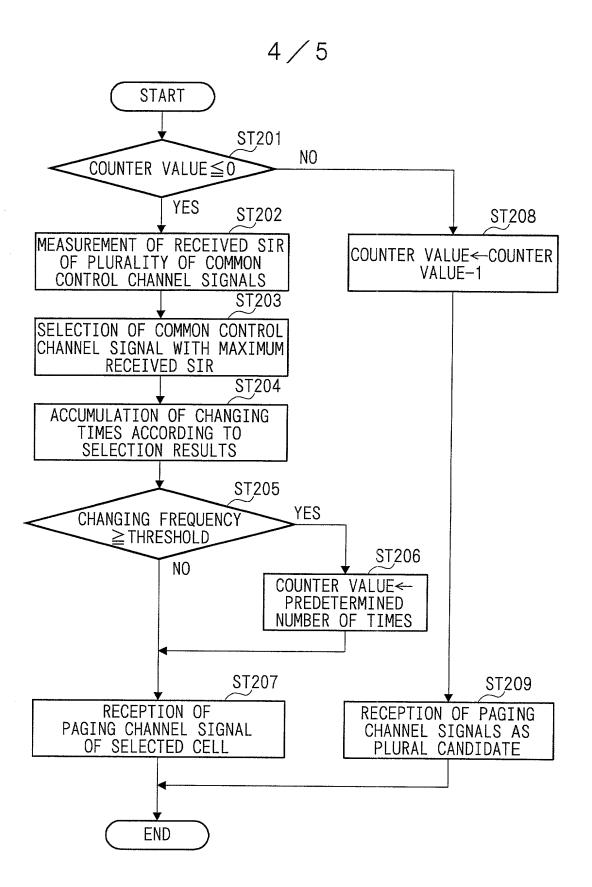


FIG. 4

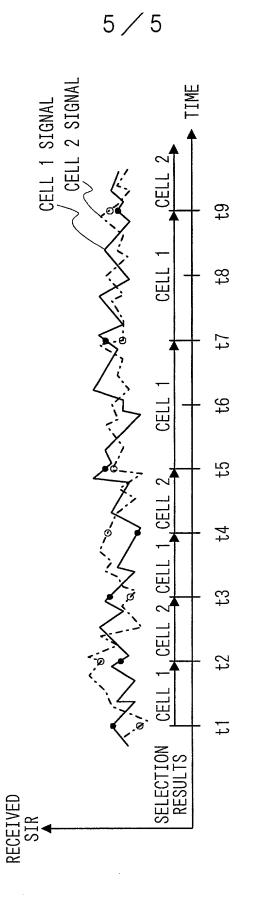


FIG. 5

APPLICATION FOR UNITED STATES PATENT **Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the specification	of which		2 (file no)	
(check at least o	4 [is attached hereto was filed on and was amended	as (5) U.S. A	Application Serial No		
Use this 7 [x] was filed	as PCT international appli	ication	,		
portion only if you 8 are entering	Number	PCT/JP00/07422				
the U.S. National 9 phase based	on Octo	ober 24, 2000				
on a PCT International Application	and was a	mended under PCT Articl	e(s) 19 and/or 34			
designating the U.S. 10	on			(if applicable).		
e listed below an on(s) designating	oreign priority be d have also iden at least one cou	Code of Federal Regulation enefits under Title 35, Unitified below any foreign and intry other than the United hich priority is claimed.	ited States Code, §119 of pplication(s) for patent or	r inventor's certificate of	or any PCT inte	rnational
te listed below an on(s) designating an that of the app	oreign priority be d have also ident at least one cou- plication(s) on w	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed. The priority Claims Under 3 are the control of t	ited States Code, §119 of pplication(s) for patent or States of America filed b	r inventor's certificate of	or any PCT inte	ernational ng a filing y Claimed
te listed below an on(s) designating an that of the app	oreign priority be d have also ident at least one cou- plication(s) on w	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed.	ited States Code, §119 of pplication(s) for patent or States of America filed b	r inventor's certificate or me on the same subjection	or any PCT inte ect matter havin	rnational ng a filing
e listed below an on(s) designating an that of the appropriate that of the app	oreign priority be d have also iden at least one cou dication(s) on w Application(s) an	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed. The priority Claims Under 3 JP11-305419 (Number)	ited States Code, §119 of application(s) for patent or States of America filed by States of America fi	r inventor's certificate or by me on the same subjection ar Filed)	Priority [x] Yes []	ernational ng a filing y Claimed
e listed below an on(s) designating an that of the app Prior (Foreign) A JAPAN (Country) (Country) Additional	oreign priority be d have also iden at least one cou- plication(s) on w Application(s) an d foreign applica from U.S. Prov	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed. The Priority Claims Under 3 JP11-305419 (Number) (Number) ation numbers are listed or risional Application(s) – I	ited States Code, §119 of application(s) for patent of polication(s) for patent of States of America filed by States of America f	ar Filed) ar Filed) data sheet attached here	or any PCT interect matter having Priority [x] Yes [] Yes eto.	ernational ng a filing y Claimed [] No [] No
e listed below an on(s) designating an that of the appropriate of the	oreign priority bed have also idential least one couplication(s) on water Application(s) and application application upplication upplication(s) lister application(s) lister also described application(s) lister also described application(s) lister also described application upplication upplication upplication(s) lister also described application upplication upplication upplication(s) lister also described application upplication upplic	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed. The Priority Claims Under 3 JP11-305419 (Number) (Number) ation numbers are listed or risional Application(s) – I	ited States Code, §119 of application(s) for patent of polication(s) for patent of States of America filed by States of America f	ar Filed) ar Filed) data sheet attached here	or any PCT interect matter having Priority [x] Yes [] Yes eto.	ernational ng a filing y Claimed [] No [] No
e listed below an on(s) designating an that of the application (Foreign) A JAPAN (Country) [at least one couplication(s) on we application(s) on we application(s) and application(s) and application(s) listed to the United States of the United State	enefits under Title 35, Unitified below any foreign a ntry other than the United hich priority is claimed. The Priority Claims Under 3 The Priority Claims Unde	ited States Code, §119 of application(s) for patent of pplication(s) for patent of States of America filed by States of America filed States Cooffice all information known actions, §1.56 which became the States of America filed States Cooffice all information known actions, §1.56 which became the States of America filed by States Cooffice all information known actions, §1.56 which became the States of America filed by States filed by States of America filed by States filed by States of America filed by States filed by States of America filed by States of America filed by States filed by Stat	ar Filed) ar Filed) ar Filed) data sheet attached here under Title 35, United Superior at that is/are listed closed in that/those price at \$112, I acknowledgown to me to be materiate available between files.	Priorite Priorite [x] Yes [] Yes eto. States Code, §1 Inth/Year Filed States application (so the duty to dial to patentabil	rnational and a filing a filing a filing a filing y Claimed [] No [] No 19(e) of an on(s) or of ar as) in the sclose ity as

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.

STEVENS, DAVIS, MILLER & MOSHER, L.L.P.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true: and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

3		PAGE	2 OF U.S.A. DECI	LARATION FORM		
13a Typewritten Full Name of Sole or First Inventor		-60 -	Hideki Given Name	Middle Name	KANEMOTO Family Name	
14a	Inventor's Signature	_	Hideki	Kanemoto		
15a	Date of Signature	_	May	Day Day	→ 00 / Year	
16a	Residence	Yokosul City		Kanagawa State or Province	JAPAN Country	JP>
17a	Citizenship	JAPAN			Country	
18a	Post Office Address (Insert complete mailing address, including country)	6-2-801,	Hikari no Oka, xa-shi, Kanagaw	a 239-0847 JAPAN		
13b	Typewritten Full Name of Sole or Second Inventor	2-00	Osamu Given Name	Middle Name	Family Name	
14b	Inventor's Signature	-	y sam	u	Karo	
15 <u>D</u>	Date of Signature	-	May Month	ンナ , Day	<i>کوو</i> / Year	
16 5	Residence	Yokosul City		Kanagawa State or Province	JAPAN Country	JPX
176	Citizenship	JAPAN				
175	Post Office Address (Insert complete mailing address, including country)		02, Shonantakat ka-shi, Kanagaw	ori, a 237-0066 JAPAN		
13c	Typewritten Full Name of Sole or Third Inventor	-	Given Name	Middle Name	Family Name	
146	Inventor's Signature					
15c.	Date of Signature]	Month	Day	Year	
16c	Residence	City		State or Province	Country	
17c	Citizenship					
18c	Post Office Address (Insert complete mailing address, including country)					
13d	Typewritten Full Name of Sole or Fourth Inventor		Given Name	Middle Name	Family Name	
14d	Inventor's Signature					
15d	Date of Signature	į	Month	Day	Year	1741
16d	Residence					
17d	Citizenship	City		State or Province	Country	
18d	Post Office Address (Insert complete mailing					
	address, including country)					4594

^{*}Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.

^{¢ 1998} STEVENS, DAVIS, MILLER & MOSHER, L.L.P.